




B1 Series Downlight



B1 15 Anti-glare &Controlled Pinhole Downlight	Cutout:75mm 8W/10W/12W/15W	Cutout:75mm 8W/10W/12W/15W	Cutout:75mm 8W/10W/12W/15W	Cutout:75mm 8W/10W/12W/15W
15° /24° 30° /36°				
15° /24° 30° /36°				

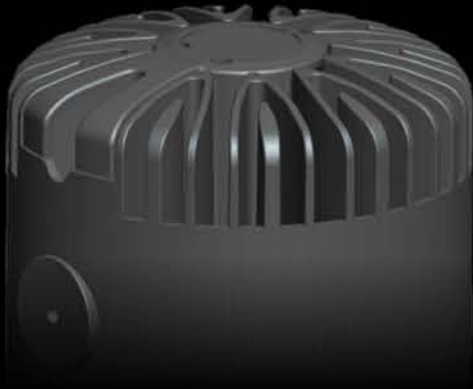


Model	PBL-B115-S F	PBL-B115-S T
LED Chip	CREE	CREE
LED Power	8W/10W/12W/15W	8W/10W/12W/15W
CCT	2700K-5000K	2700K-5000K
CRI	Ra>80/90	Ra>80/90
Beam Angle	15°/24°/30°/36°	15°/24°/30°/36°
Size	90mm*115mm	90mm*115mm
Cutout	75mm	75mm




Model	PBL-B115-Q F	PBL-B115-Q T
LED Chip	CREE	CREE
LED Power	8W/10W/12W/15W	8W/10W/12W/15W
CCT	2700K-5000K	2700K-5000K
CRI	Ra>80/90	Ra>80/90
Beam Angle	15°/24°/30°/36°	15°/24°/30°/36°
Size	90mm*115mm	90mm*115mm
Cutout	75mm	75mm

Option

Finish



Optics



Reflector

Dim Type

-TRIAC  
-0-10V  
-1-10V  
-DALI  
-Others

Lighting Efficiency

Normal:50-70lm/w  
Custom:75-85lm/w