



G1 Series Downlight

	cutout 55mm	cutout 60mm	cutout 90mm	cutout 110mm	
5W/8W/10W					12W/15W 20W/25W/30W
8W/10W					30W/35W/40W
	cutout 65mm	cutout 75mm	cutout 130mm	cutout 145mm	
	15°/24°/30°/36°		15°/24°/30°/36°/60°	15°/24°/38°/60°	




Model	PBL-G108R-2F	PBL-G108R-2T	Model	PBL-G108R-3F	PBL-G108R-3T
LED Chip	CREE	CREE	LED Chip	CREE	CREE
LED Power	5W/8W/10W	5W/8W/10W	LED Power	8W/10W	8W/10W
CCT	2700K-5000K	2700K-5000K	CCT	2700K-5000K	2700K-5000K
CRI	Ra > 80 / 90	Ra > 80 / 90	CRI	Ra > 80 / 90	Ra > 80 / 90
Beam Angle	15°/24°/30°/36°	15°/24°/30°/36°	Beam Angle	15°/24°/30°/36°	15°/24°/30°/36°
Size	65mm*79mm	75mm*79mm	Size	70mm*84mm	85mm*84mm
Cutout	55mm	60mm	Cutout	65mm	75mm
Model	PBL-G108R-4F	PBL-G108R-4T	Model	PBL-G108R-4F	PBL-G108R-4T
LED Chip	CREE	CREE	LED Chip	CREE	CREE
LED Power	12W/15W/20W	12W/15W/20W	LED Power	25W/30W	25W/30W
CCT	2700K-5000K	2700K-5000K	CCT	2700K-5000K	2700K-5000K
CRI	Ra > 80 / 90	Ra > 80 / 90	CRI	Ra > 80 / 90	Ra > 80 / 90
Beam Angle	15°/24°/30°/36°/60°	15°/24°/30°/36°/60°	Beam Angle	15°/24°/30°/36°/60°	15°/24°/30°/36°/60°
Size	102mm*97mm	120mm*98mm	Size	102mm*108mm	120mm*110mm
Cutout	90mm	110mm	Cutout	90mm	110mm
Model	PBL-G108R-5F	PBL-G108R-5T			
LED Chip	CREE	CREE			
LED Power	30W/35W/40W	30W/35W/40W			
CCT	2700K-5000K	2700K-5000K			
CRI	Ra > 80 / 90	Ra > 80 / 90			
Beam Angle	15°/24°/38°/60°	15°/24°/38°/60°			
Size	145mm*116mm	162*116mm			
Cutout	130mm	145mm			

Option

Finish



Optics

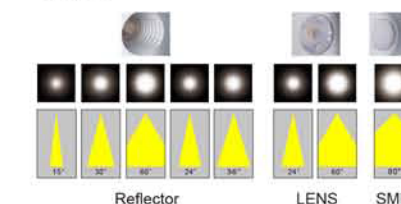

Dim Type

-TRIAC
-0-10V
-1-10V
-DALI
-Others

Lighting Efficiency

Nomal:65-85lm/w
Custom:90-100lm/w